



## Suchen eines ConiuGo LAN- Modems mit dem LANTRONIX Device-Installer


Den Lantronix- Deviceinstaller starten und den **Search-Button** wählen.  
Das LAN-Modem wird **gefunden**.

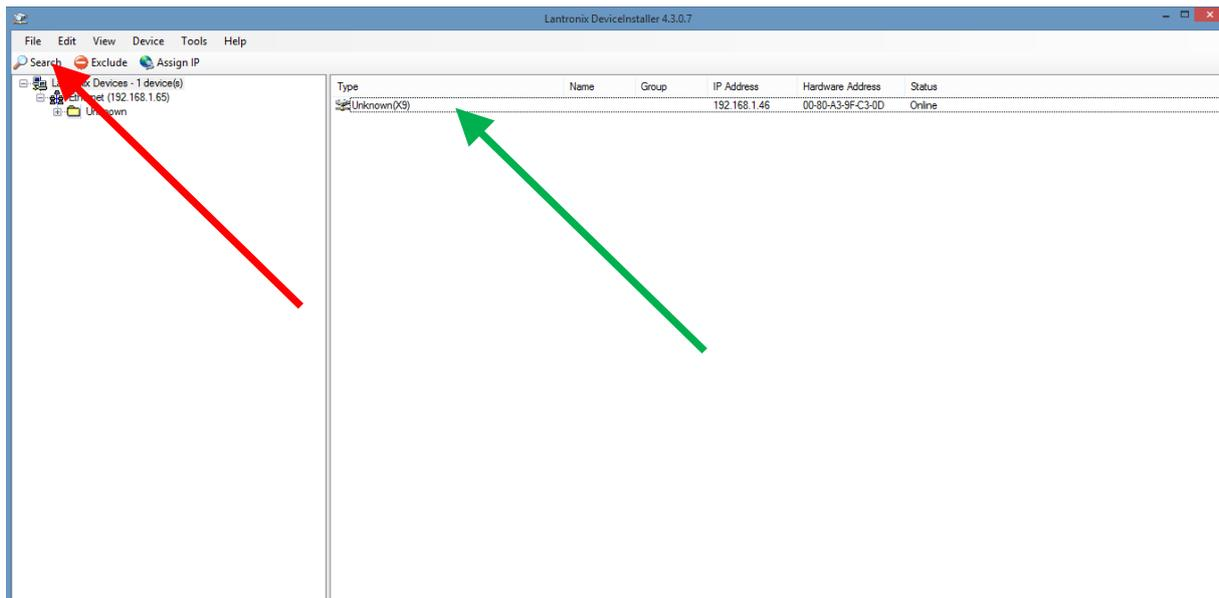


„Doppelklick“ auf das gefundene Gerät, die Einstellmöglichkeiten öffnen sich. In den Einstellmöglichkeiten **Web Configuration** wählen

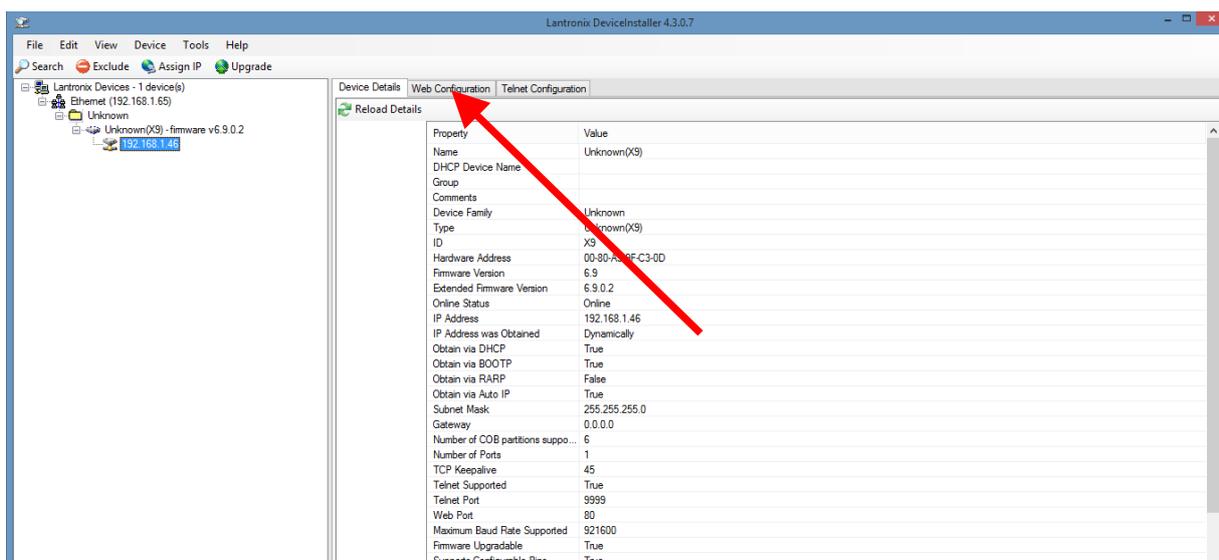

Im jetzt geöffneten softwareinternen Browser gelangt man mit dem **Wahlpfeil** und/oder dem dem **Website-Refresh** in die Anmeldung

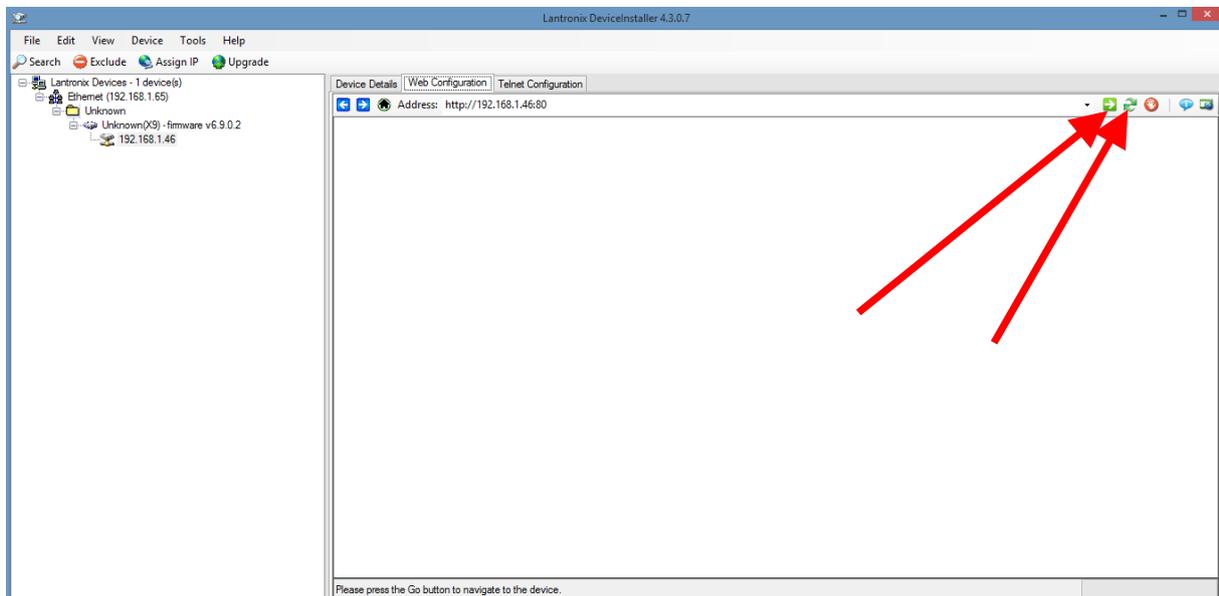

Hier nichts eintragen, sondern nur **mit OK bestätigen**

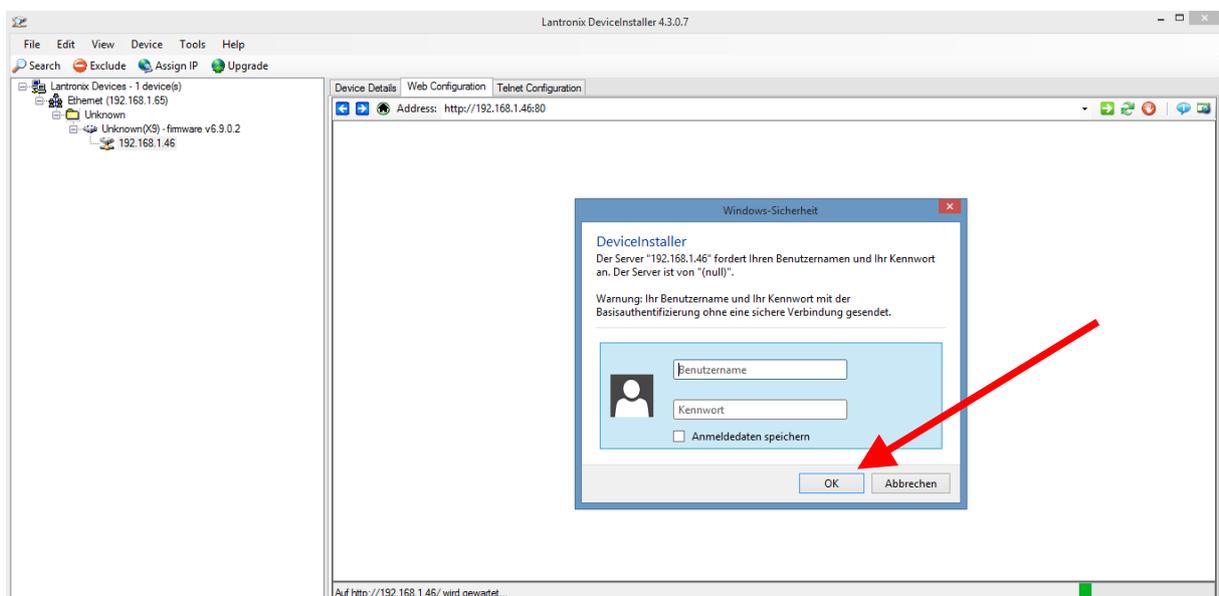


Nun sind sie in der Konfiguration angelangt und können die Einstellungen vornehmen.

Wir empfehlen dringend nur Einstellungen vorzunehmen, mit denen man das Modem nicht aus dem IP- Adressraum verliert. Die von ConiuGo empfohlenen Einstellungen sind in der Modemanleitung genau beschrieben.

Auf jeder Maske der Einstellungen ist zum Auswählen der gemachten Auswahl der OK- Button zu wählen. Ganz zum Schluss werden alle Einstellungen mit der Auswahl „APPLY ALL SETTINGS“ in das LAN- Device übertragen.

Der Übertragungsprozess ist kritisch und darf **bis zum Neustart des Device nicht gestört werden!**

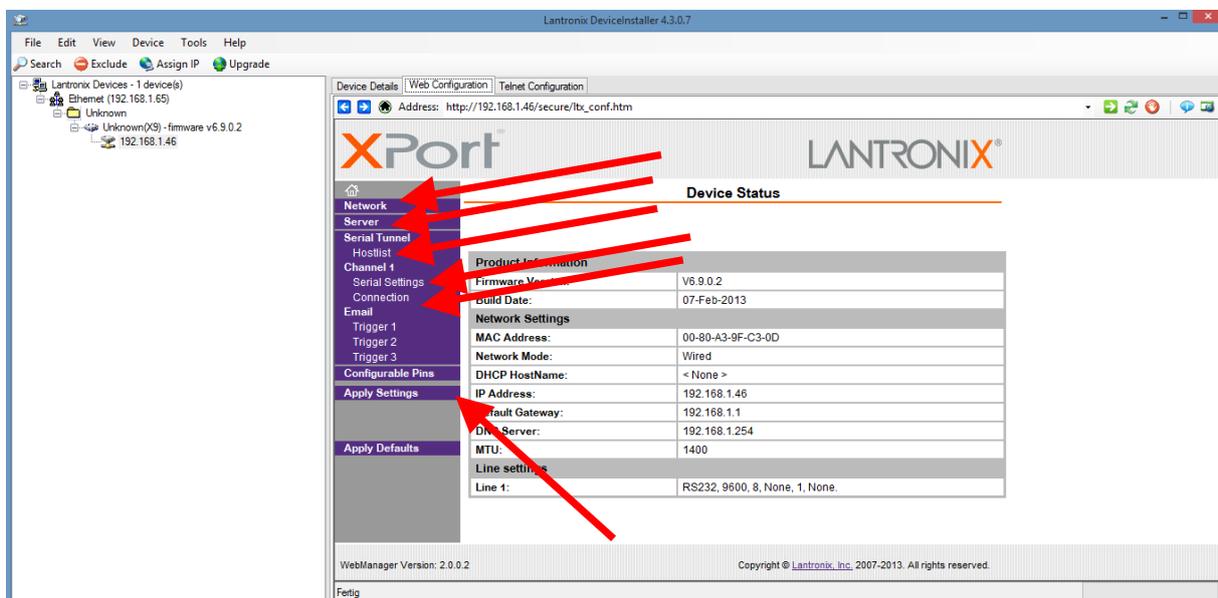

The screenshot shows the Lantronix DeviceInstaller 4.3.0.7 web interface. The left sidebar contains a navigation menu with the following items: Network, Server, Serial Tunnel, Hostlist, Channel 1, Serial Settings, Connection, Email, Trigger 1, Trigger 2, Trigger 3, Configurable Pins, **Apply Settings**, and Apply Defaults. The main content area is titled 'Device Status' and displays a table of configuration parameters. The table is divided into sections: Product Information, Network Settings, and Line settings. The 'Apply Settings' button in the sidebar is highlighted with a red arrow, and the 'Apply Settings' button in the main configuration area is also highlighted with a red arrow.

Product Information	
Firmware Version:	V6.9.0.2
Build Date:	07-Feb-2013
Network Settings	
MAC Address:	00-80-A3-9F-C3-0D
Network Mode:	Wired
DHCP HostName:	< None >
IP Address:	192.168.1.46
Default Gateway:	192.168.1.1
DNS Server:	192.168.1.254
MTU:	1400
Line settings	
Line 1:	RS232, 9600, 8, None, 1, None.